



Product data sheet

1" Standing Drive

Description

- Metal Zinc's 1" Standing Drive is used in conjunction with either the MZ Flat Ess, the MZ 1/2" Standing Ess, or MZ 1" Standing Ess.
- The MZ 1" Standing Drive is used for making a connection between two rectangular duct walls.
- Used in low pressure applications.



Features


- Meets 2005 SMACNA Standards - (Refer to page 2.74, Table 2-31, Transverse Joint Reinforcement)
- Provides external duct reinforcement

Standard Construction

- Rollformed using 24 GA ASTM A653 galvanized steel material
- 10' length

Optional Construction

- 22 to 26 GA ASTM A653 galvanized steel material
- Stainless Steel 304 & 316
- Aluminum
- PCD
- Galvanneal (Paint Grip)
- Agion (Antimicrobial Coating)

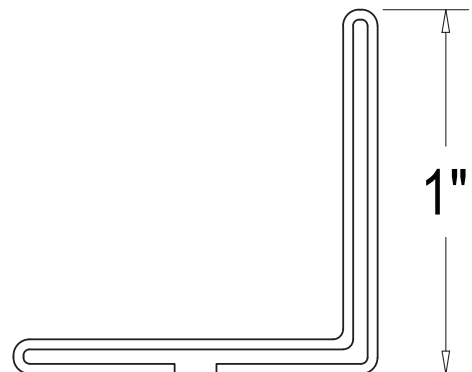

Packaging

GA	Length (ft)	Skid Qty (ft)
22	10	6500
24	10	6500
26	10	6500