

COLLARS AND TAPS

2.9C

HETO No Damper

Description

Metal Zinc's HETO (High Efficiency Take Off) without damper is used for low and medium pressure applications

Features

Welded seams for added strength and low leakage


Pressure Rating - Designed per SMACNA 3rd Edition 2005

Standard Construction

Collar and base formed from 26-Gauge ASTM A-653 G60 material
 1/8" x 1" Polyethylene "High Density" Gasket

Optional Construction

G90 Galvanized
 Stainless steel 304 and 316
 Aluminum
 Galvanneal (paint grip)
 Agion (antimicrobial coating)

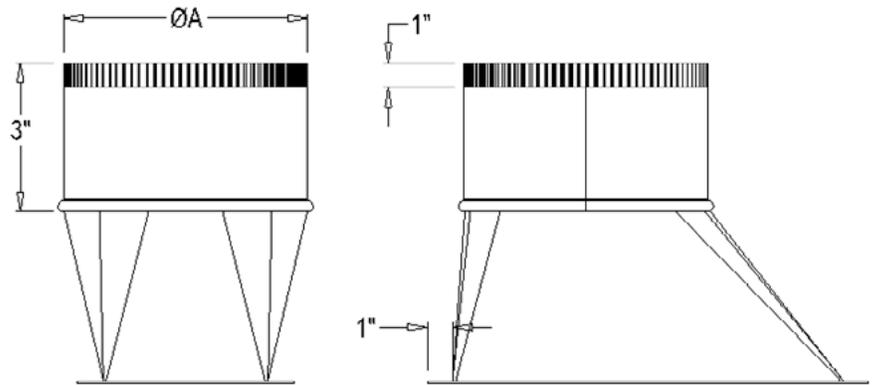

Packaging

Metal Zinc Part Number	Size A Inches	Row Quantity	Pallet Quantity
SF1056	4	20	120
SF1066	6	16	96
SF1076	8	16	96
SF1086	10	12	72
SF1091	12	9	54
SF1096	14	8	48
SF1101	16	5	30